



CEE 7/XVI



BS 1363 A



NEMA 1-15P

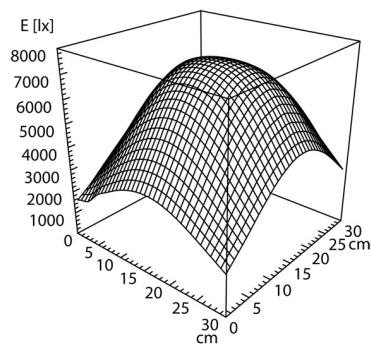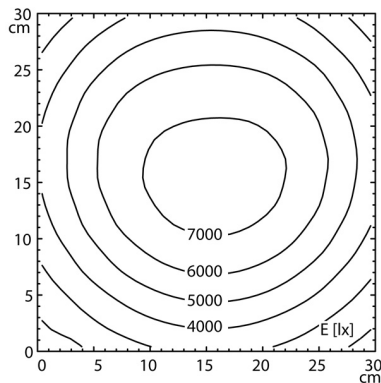

light source
work equipment
connected load
power consumption
luminous flux
luminous efficiency
light distribution
direct ratio
colour temperature
colour temperatur
color rendering index (CRI)
chromaticity tolerance LED
system of protection
class of protection

technology
operation
housing
cover
arm

weight (net)
mains lead

fastening

lens, dimensions
lens material
lens, diopters

LED
electronic plug-in ballast
100-240 V, 50/60 Hz
env. 12 W
approx. 800 lm
approx. 67 lm/W
direct
approx. 100 %
neutral white
approx. 5.000 K
≥ 80
< 3 SDCM
IP 20
II with plug-in power supply, III without plug-in power supply
continuously dimmable
push button
plastic; untreated; aluminium coloured anodised
25
tubular aluminium section; anodized; aluminium coloured anodised
env. 2,515 kg
approx. ca. 3 m m; mains plug; CEE 7/XVI; BS 1363 A; NEMA 1-15P
table clamp (accessory); wall bracket (accessory); screw-down flange
Ø 160 mm
PMMA
3,5