



fitted with

work equipment

connected load
power consumption
light distribution
glare-free
system of protection
class of protection
luminaire body
weight (net)
mains supply

fastening
dimension
light output
outside diameter
side part

2 x regular fluorescent lamp T16 54W/840 G5
light colour neutral white
Energy efficiency category A
electronic ballast
Energy efficiency index (EEI): A2 BAT
220-240V; 50/60Hz
approx. 118 W
direct
aluminiumised parabolic louvre
IP 67
I
borosilicate glass,
approx. 6.0 kg
connection box
160 BU/3
lamp bracket (accessory)
A=1744 mm
D=1048 mm
70 mm
C with screwed cable gland




160 BU/3

illuminance

Comment: d=100cm

Em: 698 lx
Emax: 1185 lx
Emin: 228 lx

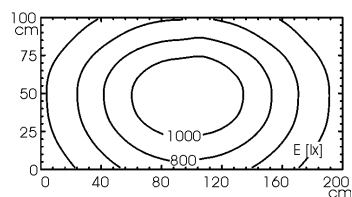

luminous intensity

