



fitted with

work equipment
connected load
Power consumption
luminous flux
luminous efficacy
light colour
color rendering index (CRI)

Glare-free
System of protection
class of protection
technology
usage
luminaire body

weight (net)
mains lead

design
Fastening
special features

LED

Energy efficiency category A+
electronic transformer
100-240 V; 50/60 Hz
approx. 34 W
approx. 1950 lm
approx. 57 lm/W
neutral white, approx. 4000 K
> 80
conical prismatic screen
IP 20
I
continuously dimmable
multi-function switch
sectional aluminium, anodised, aluminium coloured
anodised
approx. 1.8 kg
approx. 4,7 m; mains plug
CEE 7/VII
mounted version
screw-down bracket; horizontal
fixed connection




CEE 7/VII

illuminance

distance: 50 cm

Em: 1641 lx
E_{max}: 4046 lx
E_{min}: 329 lx

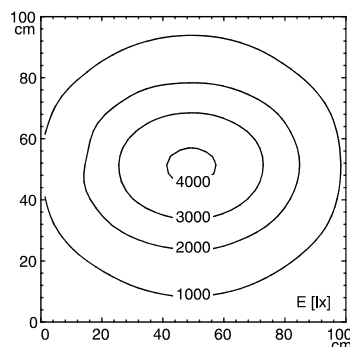

luminous intensity

